


REVISIONS

DOC. NO. SPC-F005 * Effective: 7/8/02 * DCP No: 1398

DCP #	REV	DESCRIPTION	DRAWN	DATE	CHECKD	DATE	APPRVD	DATE
1906	A	RELEASED	EO	04/17/06	TL	05/25/06	HO	05/25/06



RoHS
Compliant

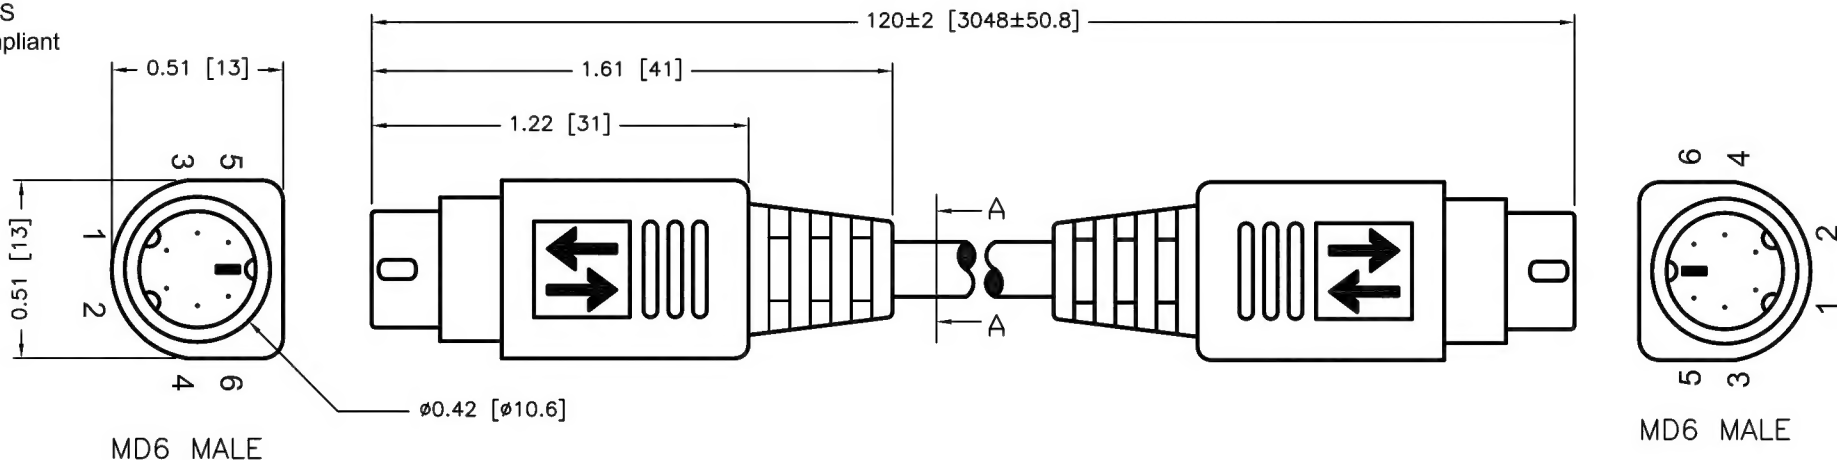

Specifications:

1. Molded connector end requirements:

- A) Inner mold using PE
- B) Aluminum foil wrap to connector
- C) PVC - 45P, Platinum gray

2. Cable:


[28AWG (7/0.12)*6C+AL/MY+DW(7/0.16)]TIN
Wire: OD=0.78±0.03mm
Color: Black, Brown, Red, Orange, Yellow, Green
Jacket: PVC, OD = Ø5.0±0.15mm
Color: Platinum gray

3. Connectors: Mini Pin 6p Male, Nickel plating, Insulator Color: Black

4. Cable: 6C+1 28AWG

PIN OUTS

MD 6PM	WIRE COLOR	MD 6PM
1	BLACK	1
2	BROWN	2
3	RED	3
4	ORANGE	4
5	YELLOW	5
6	GREEN	6
SHELL		SHELL

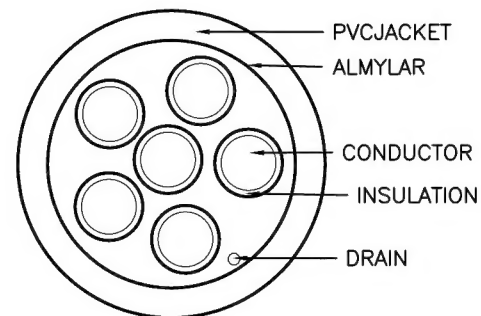

SECTION A-A

DISCLAIMER:
ALL STATEMENTS AND TECHNICAL INFORMATION CONTAINED HEREIN ARE BASED UPON INFORMATION AND/OR TESTS WE BELIEVE TO BE ACCURATE AND RELIABLE. SINCE CONDITIONS OF USE ARE BEYOND OUR CONTROL, THE USER SHALL DETERMINE THE SUITABILITY OF THE PRODUCT FOR THE INTENDED USE AND ASSUME ALL RISK AND LIABILITY WHATSOEVER IN CONNECTION THEREWITH.

TOLERANCES:

UNLESS OTHERWISE SPECIFIED, DIMENSIONS ARE FOR REFERENCE PURPOSES ONLY.

DRAWN BY:

EKLAS ODISH

CHECKED BY:

THOMAS LEE

APPROVED BY:

HISHAM ODISH

DATE:

04/17/06

DATE:

05/25/06

DATE:

05/25/06

DRAWING TITLE:

Keyboard Extension & Data Cable, 10 FT, Mini Din 6P M/M

SIZE

A

DWG. NO.

SPC20032

ELECTRONIC FILE

83K3763.DWG

REV

A

SCALE: NTS

U.O.M.: INCHES [mm]

SHEET: 1 OF 1